



SERIE INDUSTRIAL CORRIENTE CONTINUA (C.C.) 12V - 24V

DIRECT CURRENT INDUSTRIAL SERIES (D.C.) 12V - 24V



C-2



D-2



K-2

CUERPO BOMBA PUMP BODY

Latón Brass
Acero inoxidable 316L Stainless steel


TURBINAS IMPELLERS

NEOPRENO / NEOPRENE:	de utilización general / general use	70°C
NITRILO / NITRILE:	para aceites y derivados / for oil and by-products	80°C
HYPALON / HYPALON:	para productos químicos / for chemical products	110°C
E.P.D.M. / M.D.P.E:	para productos corrosivos / for corrosive products	80°C
SANITARIA / SANITARY:	para uso alimentario / for food use	100°C

MODELO MODEL	CTE	r.p.m	C.V / H.P.	kW	A	l/h	bar
D-2	12 V	2.000	1/10	0,08	11	400	3
	24 V	2.000	1/10	0,08	5,5	400	3
C-2	12 V	2.000	1/10	0,08	11	1200	0,6
	24 V	2.000	1/10	0,08	5,5	1200	0,6
K-2	12 V	2.000	1/8	0,09	15	700	3
	24 V	2.000	1/8	0,09	8	700	3

SERIE INDUSTRIAL C.C.

D.C. INDUSTRIAL SERIES

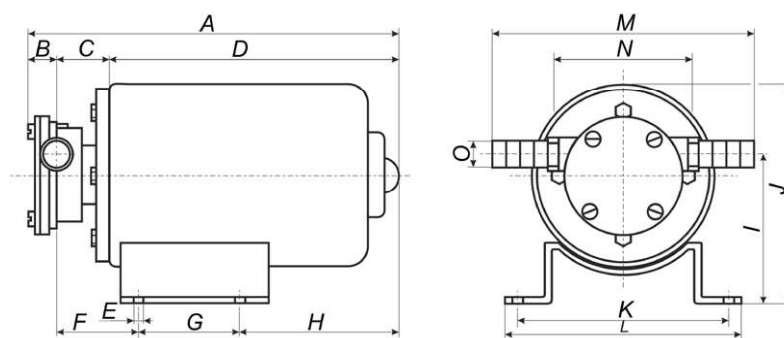

MODELO MODEL

D-2
C-2
K-2

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
170	18	30	122	7	42	51	60	67	92	85	103	152	83	11
160	11	27	122	7	40	51	60	71	92	85	103	109	62	18
195	14	36	145	7	66	51	65	72	92	85	103	125	70	16

DESPIECE PACK BREAKDOWN

40	Turbina	44	Leva	49 (62/59)	Tornillo cuerpo	56	Boquillas
41	Tapa exterior	49 (41)	Tornillo tapa exterior	53	Retén	58	Corta aguas
42	Tapa interior	49 (42)	Tornillo leva	55	Junta tórica	62	Cuerpo bomba
40	Impeller	44	Levy	49 (62/59)	Body screw	56	Nozzles
41	Outer cap	49 (41)	Outer cap screw	53	Seal	58	Water cut-off
42	Inner cap	49 (42)	Levy screw	55	O-ring	62	Pump body

