


AISI 316L

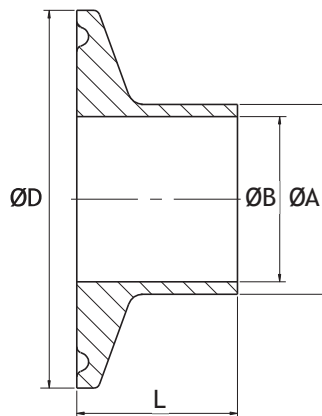

INFORMACIÓN TÉCNICA - TECHNICAL INFORMATION

Designación - Designation				Norma de aplicación <i>Application standard</i>	DIMENSIONES - DIMENSIONS				Peso aprox. <i>Weight aprox.</i> (g)
COD.	Tubo de Acero <i>Steel tube</i>				Diámetro entronque <i>Collar diameter</i>	Diámetro interior <i>Bore diameter</i>	Diámetro exterior <i>Outside diameter</i>	Longitud <i>Length</i>	
	DN	NPS	Ød (mm)		ØD (mm)	ØB (mm)	ØA (mm)	L (mm)	
7710000 ¹⁾		1/2"	12,7	3-A / ASME BPE	25,4	9,4	12,7	28,6	23
7710022 ²⁾	10		12,0	EHEDG / DIN 32676	34,0	9,0	12,0	21,5	35
7710024 ²⁾	15		18,0	EHEDG / DIN 32676	34,0	15,0	18,0	21,5	33
7710001 ¹⁾		3/4"	19,05	3-A / ASME BPE	25,4	15,8	19,0	28,6	25
7710026 ²⁾	20		22,0	EHEDG / DIN 32676	34,0	19,0	22,0	21,5	30
7710002 ¹⁾		1"	25,4	3-A / ASME BPE	50,5	22,1	25,4	28,6	84
7710028 ²⁾	25		28,0	EHEDG / DIN 32676	50,5	25,0	28,0	21,5	70
7710030 ²⁾	32		34,0	EHEDG / DIN 32676	50,5	31,0	34,0	21,5	60
7710004 ¹⁾		1 1/2"	38,1	3-A / ASME BPE	50,5	34,8	38,1	28,6	67
7710032 ²⁾	40		40,0	EHEDG / DIN 32676	50,5	37,0	40,0	21,5	50
7710006 ¹⁾		2"	50,8	3-A / ASME BPE	64,0	47,5	50,8	28,6	93
7710034 ²⁾	50		52,0	EHEDG / DIN 32676	64,0	49,0	52,0	21,5	72
7710008 ¹⁾		2 1/2"	63,5	3-A / ASME BPE	77,5	60,2	63,5	28,6	119
7710036 ²⁾	65		70,0	EHEDG / DIN 32676	91,0	66,0	70,0	21,5	166
7710010 ¹⁾		3"	76,2	3-A / ASME BPE	91,0	72,9	76,2	28,6	145
7710038 ²⁾	80		85,0	EHEDG / DIN 32676	106,0	81,0	85,0	21,5	196
7710012 ¹⁾		4"	101,6	3-A / ASME BPE	119,0	97,4	101,6	28,6	245
7710040 ²⁾	100		104,0	EHEDG / DIN 32676	119,0	100,0	104,0	21,5	188

CARACTERÍSTICAS BÁSICAS

- Fabricada en Acero Inoxidable AISI 316L.
- Pulido sanitario ($Ra \leq 0,8 \mu m$).
- Presión máxima de trabajo: PN 10.

Observaciones:

- ¹⁾ Fabricados según ASME BPE (longitud tipo B) y BS 4825-3. Compatibles con tubos inoxidables según ASME BPE y BS 4825-1 o equivalentes.
- ²⁾ Fabricados según DIN 32676 y ISO 2852. Compatibles con tubos inoxidables según UNE-EN 10357 (Series A y B) y DIN 11850 (Series 1 y 2) o equivalente.

APLICACIONES GENERALES

- Industrias Farmacéutica, Alimentaria, Petrolera, Lácteos, Bebidas, Cosméticos, Químicas, Biotecnología, etc.

BASIC FEATURES

- Made of Stainless Steel AISI 316L.
- Sanitary polish ($Ra \leq 0,8 \mu m$).
- Maximum working pressure: PN 10.

Remarks:

- ¹⁾ Made according to ASME BPE (type B length) and BS 4825-3. Compatible with stainless steel pipes according to ASME BPE and BS 4825-1 or equivalent.
- ²⁾ Made according to DIN 32676 and ISO 2852. Compatible with stainless steel pipes according to EN 10357 (Series A and B) and DIN 11850 (Series 1 and 2) or equivalent.

GENERAL APPLICATIONS

- Pharmaceutical, Food, Petroleum, Dairy, Beverage, Cosmetic and Chemical industries, Biotechnology, etc.